

UPERFECT[®]

14" Dual Laptop Screen Extender User Manual



In order to ensure your safe use of this product, please read this manual carefully before using this product and keep it properly.

Email: support@uperfect.com

Chapter 01 Preparations

Checking the Package Contents



Dual Portable Monitor



Power Adapter



User Guide



mini HDMI to Standard HDMI Cable




Type-C to Type-C Cable*2

Note:

- If any of the above items is damaged or missing, please contact us immediately. (support@uperfect.com)
- The appearance of the components may differ from the images shown.

Product Appearance & Interface Function Introduction

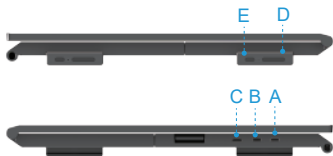

A: USB-C Port

For signal transmission and power supply

B: Mini HDMI Port

For signal transmission.

D: +/- Port

Short press to adjust the Brightness;
Press to control the cursor in the menu.


E: Menu Port

Short press to enter the OSD menu /
Long press to return to the previous menu page.


Chapter 02 How to Install On Your Device

Note: Support 14"-17" Laptop

Step1 Open the clips on both sides and stretch both sides to the maximum.



Step2

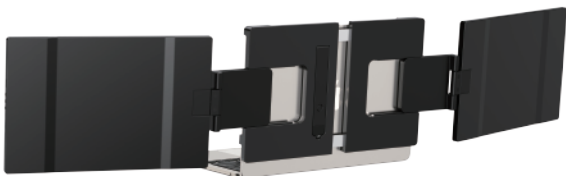

Step3



Chapter 03 Specifications

Screen Size	14 inch * 2
Resolution	1920*1080
Aspect Ratio	16:9
Panel Type	IPS
Screen Type	Matte
Interfaces	Mini HDMI Port
	Type-c Port * 2
Built-in Speakers	No Speaker
VESA	No VESA Mountable

Quick Start

How can I tell if the USB-C port on my computer is full-featured ?

A USB-C port with one of the following symbols is a full-featured one.

Thunderbolt 3 or Thunderbolt 4 ports are also full-featured ports .



Chapter 04 Connecting

Note: The right monitor is connected via wifi

Checking the Package Contents

The left monitor connect with your laptop via Type-C port and the right monitor connect with your laptop via wifi.



Connect Via Mini HDMI and Power Adapter

The left monitor via Mini HDMI to HDMI connection only for signal transmission,so please connect with power adapter for power supply,the right monitor connect with your laptop via wifi.




Chapter 05


How to Use Your Devices' Speakers?

Note: as this monitor can not built in any speakers, so if you need to playback volume, please kindly set on your laptop and use your laptop's speakers.

Connect to Macbook

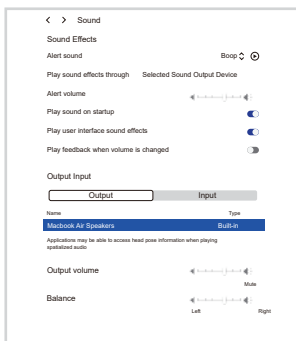


Connect to Windows

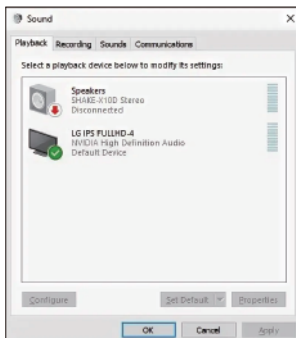






Chapter 06 Rotate the Screen

- 1: Verify that your cables are connected properly to the new monitors.
 - 2: Right-click anywhere on your desktop and select Display settings to open the Display page.
 - 3: Under the "Select and rearrange displays" section, select the monitor that you want to adjust.
 - 4: Under the "Scale and layout" section, use the Orientation drop-down menu to select Landscape or Portrait screen.
- For the macOS system: to achieve the ABC three-screen expansion mode, the right display cannot be set as the primary display, and the mirroring function must be turned off. Otherwise, only the ABB expansion mode can be achieved. (B refers to the MacBook series of laptops)

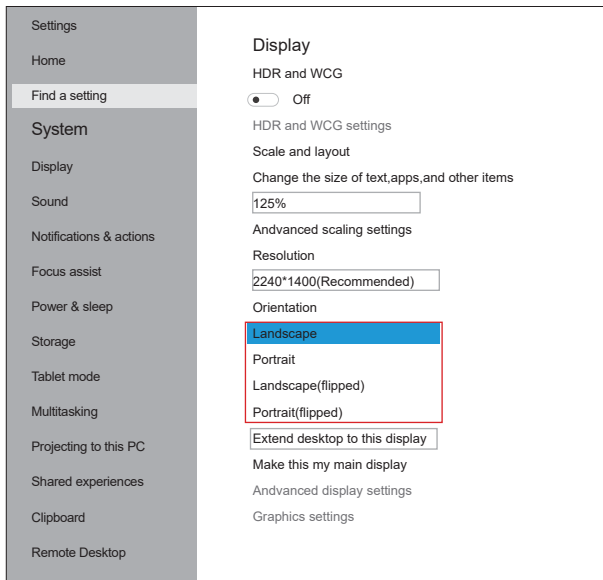

Chapter 07 Screen Adjustment

On-Screen Display Menu Introduction

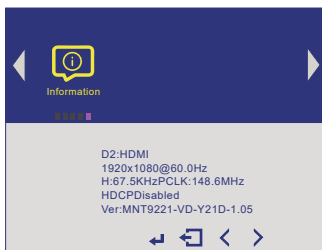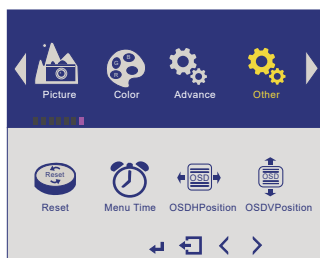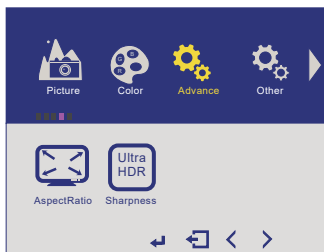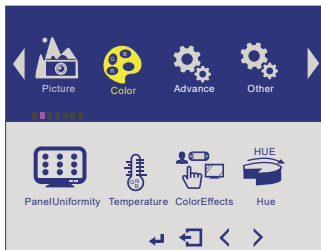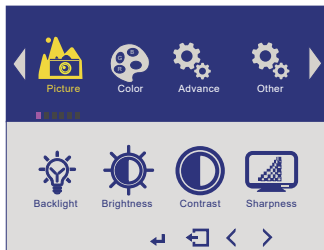

Chapter 08 Q&A

Important Tips:

If you have any issues with your monitor, please contact us at support@uperfect.com before returning it. We will help you solve your problems and try our best to make you satisfied. We take full responsibility for our products.

If there are any defects that cannot be solved, we will refund or send you a replacement.

Q1: Why does my monitor not turn on?

- A:
1. Please check whether correctly connect via USB-C or HDMI check whether you connect with power supply.
 2. This may be caused by insufficient power supply. Please make sure to use original power supply, otherwise the monitor may not work properly.
power supply.

Q2: What should I do if it shows no signal?

- A:
1. When connecting with a USB-C cable, make sure your device supports USB3.1/Thunderbolt 3. If not, please add a Mini HDMI to HDMI cable for signal transmission and connect with power supply
 3. Please try another device. If it still fails, please tell us for a replacement.

Q3: What should I do if it shows no signal?

- A:
- Try these quick fixes:
1. Re-plug the USB-C/HDMI cable firmly, or use a certified replacement cable.
 2. Please confirm whether connect with power supply when using, insufficient power supply can cause this problem
 3. Test the monitor on another device—if normal, update your original device's graphics drivers.

Still not working? Contact our after-sales team with your order number for a solution.

Chapter 09 Service Support

Dear Customer,

Thank you for purchasing the Portable USB Monitor!

We offer 100% money back guarantee in 30 days and 90 days replacement, 12 month warranty for any issue, professional tech support to ensure no-worry service.

Any query or problem, please contact us via

support@uperfect.com

